

The Complete FRANTOM Cabachon Unit with a 10" Diamond Blade

ALL YOU NEED IS THE ROCK

This Unit comes Equipped with -

1—8"x1½" 100 grit wheel 1—8"x1½" 220 grit wheel 1—8"x3" Drum Sander

1—8" Peel 'em Off sanding and polishing disk 1—Jar Peel 'em Off Cement

1-10" Felker Saw .040 1-8" Polishing Leather 1-8" Polishing Felt

1 Sponge

Rest for shaping preforms and dressing wheels

Weight feed attachment for saw Polishing compound and doping wax

The unit is mounted on a common base.

A new 1/3 h.p. motor mounted on rails so that you may obtain 5 different speeds.

(Overhead water feed)

FRANTOM is Precision Built . . Rugged and Dependable _

Specifications:

Trim saw is cast completely from Durite Aluminum alloy with a tensile strength almost equal to steel. No rust or corrosion. Trim saw table 14"x16" with plastic shield. Guard tank is deep to allow sludge to settle, is free from leaks and designed to control coolant. Trim saw is equipped with vise that holds specimens 3"x4". Weight feed attached and can be pivoted for cutting preforms. Main shaft is 1" polished and ground steel with 1" full self-aligning ball bearings

which are trouble free. Pulley is 3-step with V-belt for the shortest centers.

All rigid and removable machined parts are of Durite to prevent rust and corrosion . . Entire unit mounted on a specially treated wooden base and balanced for quiet, efficient operation.

Dimensions:

Overall length 38"; width 14"; height 12"; distance between wheels 8". Every desirable feature. Wt. 105-lbs., shipping wt. 145-lbs.

Courtesy to Dealers • Calif. Purchasers add Sales Tax • Crating Charge \$4.00 • Prices F.O.B. Hawthorne




Product of

FRANTOM Lapidary Equipment

Hawthorne, Calif.



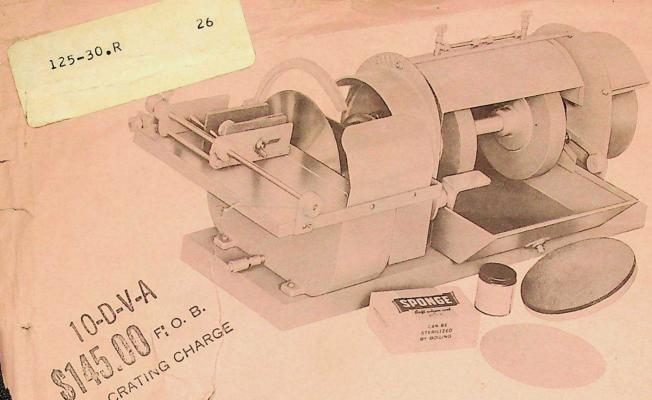

The Complete FRANTOM Cabachon Unit with a 10" Diamond Blade

This Unit comes Equipped with -

- 1-8"x1½" 100 grit wheel 1-8"x1½" 220 grit wheel 1-8"x3" Drum Sander
- 1—8" Peel 'em Off sanding and polishing disk 1—Jar Peel 'em Off Cement
- 1-10" Felker Saw
- 1-8" Polishing Leather

Rest for shaping preforms and dressing wheels Weight feed attachment for saw (Overhead water feed)

FRANTOM is Precision Built . . Rugged and Dependable

Specifications:

Trim saw is cast completely from Durite Aluminum alloy with a tensile strength almost equal to steel. No rust or corrosion. Trim saw table 14"x16" with plastic shield. Guard tank is deep to allow sludge to settle, is free from leaks and designed to control coolant. Trim saw is equipped with vise that holds specimens 3"x4". Weight feed attached and can be pivoted for cutting preforms. Main shaft is 1" polished and ground steel with 1" full self-aligning ball bearings

which are trouble free. Pulley is 3-step with V-belt for the shortest centers.

All rigid and removable machined parts are of Durite to prevent rust and corrosion . . . Entire unit mounted on a specially treated wooden base and balanced for quiet, efficient operation.

Dimensions:

Overall length 38"; width 14"; height 12"; distance between wheels 8". Every desirable feature. Wt. 85 lbs., shipping wt. 120 lbs.

Calif. Purchasers add Sales Tax • Crating Charge \$4.00 • Prices F.O.B. Hawthorne

Product of

FRANTOM Lapidary Equipment

Hawthorne, Calif.

